


PAINT FOR HORIZONTAL ROAD MARKING TWO-COMPONENT COLD PLASTIC



DESIGNATION AND PROPERTIES:

- Two component acrylic product, designated for thick coating marking (2 mm).
- Perfect adhesion.
- Perfect stability to oils and resins.
- Extremely quick drying.
- Perfect day and night visibility thanks to glass beads inclusion.

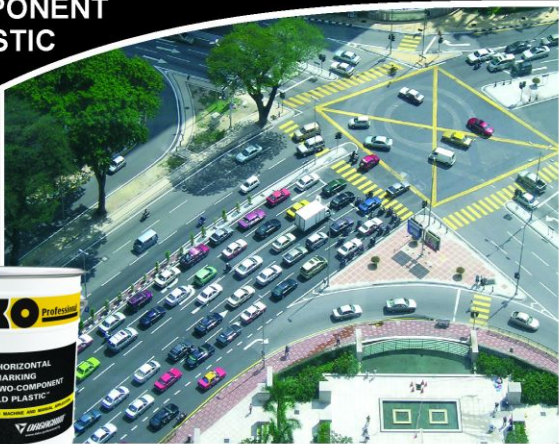

TECHNICAL PARAMETERS:

INDEXES	NORMS
Density, (23±0.5)°C: (EN ISO 2811-1)	2,14 ± 0.1 kg/l
Potlife (min) 23 ± 2°C:	15-20 min
Time of complete drying, (23±2)°C, In film thickness 2mm: (EN 29117)	30 min
Consumption:	4,5 kg/m ² / 2 mm
Packaging:	Metal packaging in net weight 22 kg

