


## PAINT FOR HORIZONTAL ROAD MARKING

## THERMO PLASTIC

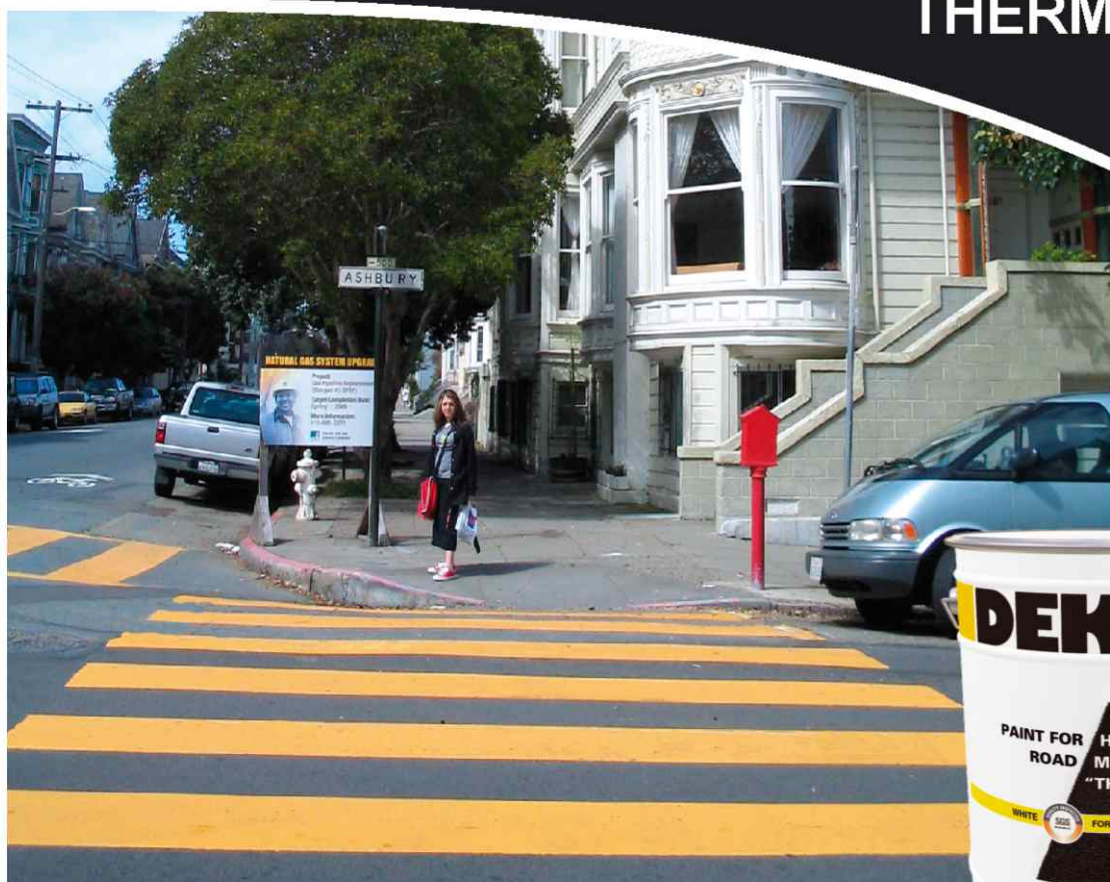

### DESIGNATION AND PROPERTIES:

- Designated for road marking working under extremely heavy road traffic conditions, for thick coating up to 3mm;
- Extremely good durability under intensive traffic;
- Extremely quick drying;
- Extremely good adhesion to the base;
- Glass beads included.

### TECHNICAL PARAMETERS:

ПОКАЗАТЕЛИ И ИНДЕКСЫ	NORMS
Content of glass beads (BS 6088, class A) in %	Not less than 20
Lightness of coating as per CIELAB L* {d/o}	Not less than 90
Coefficient of cohesion - for dry coating - for wet coating	Not less than 0.75 Not less than 0.30
Temperature of melting, 8 °C	Not less than 95
Time of complete drying, (23±2)°C, In film thickness 2mm:	5-10 min
Consumption:	6.00 kg/m <sup>2</sup> in thickness 3 mm



Application



Consumption



6 kg/m<sup>2</sup>

Drying



5-6

Shelf life



24 month

Colours

